



Total Power International, Inc.

AC/DC EXTERNAL DESKTOP ADAPTER UNIVERSAL INPUT SINGLE OUTPUT 25-36 WATTS SWITCHING POWER SUPPLIES TPES34 SERIES



FEATURES

- UNIVERSAL AC INPUT
- DESKTOP IEC320 AC RECEPTACLE
- MEET UNIVERSAL SAFETY STANDARDS
- EMI MEET EN 55022 / FCC CLASS B
- CE MARKING COMPLIANCE

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: 90-264Vac typical.
Input Connector: IEC320-3P DT7 type AC inlet receptacle.
Input Frequency: 47-63Hz.
Inrush Current: 35A max. @264Vac or less than 30A @230Vac by adding thermister.
Input Current: 0.65A @115Vac typical. 0.3A @230Vac typical.
Dielectric Withstand: Meet IEC60950.
EMI: Meet EN 55022 / FCC Class B.
Hold-up Time: 17mS @115Vac typical. 68mS typ. @230Vac typical.

OUTPUT SPECIFICATION

Output Voltage: See Ratings Chart.
Output Current: See Ratings Chart.
Output Wattage: 25-36Watts typical.
Output Connector & Cord: Optional.
Line Regulation: 0.1% typical.
Load Regulation: ±1.5-3.0% typical.
Noise & Ripple: 1.0% typical peak to peak.
OVP: Built-in, by Zener diode clamping.
Adjustability: Factory set.
Overload Protection (OLP):
 Fully protected against output overload and short circuit. OLP set at about 125-150% rating output wattage. Consult the factory for OLP setting.

GENERAL SPECIFICATION

Efficiency: 80-85% typical.
Switching Frequency: Approximate 73K Hz.
Circuit Topology: Fixed Frequency Flyback circuit.
Transient Response: Output voltage returns in less than 3mS following a 25% load change.
Safety Standard: Meet UL1950/ EN60950, Class I.
Power Density: 2.70 Watts / Cubic inch.

Operating Temperature: 0 to +25/35/40°C without derating. (various with output voltage)
Storage Temperature: -20°C to +85°C.
Temperature coefficient: 0.04% /°C.
Cooling: Free air convection.
Construction: Impact resistant thermo-plastic enclosure case.
Desktop Format.

NOTE: (1) All measurements are at nominal input, full load, and +25°C unless otherwise specified.
 (2) Load regulation is measured at 115Vac or 230Vac in percentage indicate the change in output voltage as the load varied from half load to full load(±%)
 (3) The exact obtainable load regulation depends upon the output cord selected and load current. Upper data are for 6 ft. (2 m) cord AWG#18 wires.
 (4) Due to requests in market and advances in technology, specifications subject to change without notice




For the details of safety approval, please consult the factory.



Total Power International, Inc.

MODEL NO. DESCRIPTION: TPES34 - X X X Y Y Y

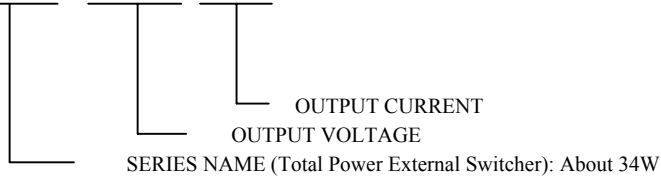

OUTPUT VOLTAGE/CURRENT RATINGS CHART

DEFINED OUTPUT VOLTAGE (Vdc)	OUTPUT VOLTAGE(Vdc)/ CURRENT (A)
3.3Vdc ≤ Any Voltage < 12.0Vdc	3.3-4.0V/4.0A, 5.0-5.9V/5.0-4.77A, 6.0-6.9V/4.75-4.52A, 7.0-7.9V/4.5-4.27A, 8.0-8.9V/4.25-4.02A, 9.0-9.9V/4.0-3.63A, 10.0-10.9V/3.6-3.3A, 11.0-11.9V/3.27-3.02A.
12.0Vdc ≤ Any Voltage ≤ 24.0Vdc	12.0-12.9V/3.0-2.79A, 13.0-13.9V/2.76-2.58A, 14.0-14.9V/2.57-2.41A, 15.0-15.9V/2.4-2.26A, 16.0-18.0V/2.25-2.0A, 18.1-20.0V/1.98-1.8A, 20.1-22.5V/1.79-1.60A, 22.6-24.0V/1.59-1.5A.

Note: Refer to the upper Chart or specify the V/A ratings and consult factory for the exact Model No.

SINGLE OUTPUT *(Model No for example)*

MODEL NO.	O/P VOLTAGE	O/P CURRENT
TPES34-033400	3.3Vdc	4.0A
TPES34-050500	5.0Vdc	5.0A
TPES34-090400	9.0Vdc	4.0A
TPES34-120300	12.0Vdc	3.0A
TPES34-150240	15.0Vdc	2.4A
TPES34-180200	18.0Vdc	2.0A
TPES34-240150	24.0Vdc	1.5A

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 330.0g (11.6 Oz.)

