

# TPSUU300 SERIES

300W U Bracket Type  
I.T.E. Power Supplies

## Features:

- Wide Operating Voltage 90 to 260 VAC, 47 to 63 Hz
- Internal EMI filter
- Single Output
- Active Power Factor Correction
- Over Voltage Protection (Crowbar Design)
- Input Surge Current and Over Load protection
- Zero Voltage Switching(ZVS)
- Class I
- 2 year warranty



## Electrical Characteristics:

Vin	Safety Approvals Input Voltage Range		100~240VAC
	Operate Voltage Range		90~260VAC
fin	Input Frequency		47~63Hz
PF	Power Factor Correction	Io=Full load, Vin=240VAC	0.95~1
Po	Output Power Range		See rating chart
Vo	Output Voltage Range		See rating chart
Io	Output Current Range		See rating chart
Iil	Input Current (Low Line)	Io=Full load, Vin=100VAC	3.9A
Iih	Input Current (High Line)	Io=Full load, Vin=240VAC	3.9A
Ir	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC	45A (max.)
	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC	90A (max.)
Eff	Efficiency	Io=Full Load, Vin=230VAC	88~94%
REG-i	Line Regulation	Io=Full Load	0.5~1%
REG-o	Load Regulation	Vin=230VAC	2~5%
OVP	Over Voltage Protection	Over Voltage Protection	112~132%
OCP	Over Current Protection	Over Current Protection	110~150%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC	4mS (max.)
Th	Hold-Up Time	Io=Full Load, Vin=110VAC	20mS (min.)
Ts	Start Up Time	Io=Full Load, Vin=100VAC	3S (max.)
Vp-p	Ripple & Noise(Peak to Peak)	Full Load, Vin=90VAC	1% (max.)
Iik	Safety Ground Leakage Current	Vin=240VAC/60Hz	0.75mA (max.)
TC	Temperature Coefficient	All output	±0.04%/°C
Pno	No-Load Power Consumption	No load, Vin=230VAC	See rating chart
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242VDC (min.)
Vpg	Dielectric Withstanding Voltage for Primary to PE	Primary to PE	2550VDC (min.)
Ris	Isolation Resistance	Test Voltage=500VDC	50MΩ (min.)

## Application:

- Industrial PC
- Electrical Test & Measurement Instruments
- communication equipment
- AV equipment

## Safety Approvals:

cUL<sup>®</sup> US CE CB



UL/c-UL(UL 60950-1:2nd Edition)  
TUV/GS(EN 60950-1:2nd Edition)

## Environmental

To	Operating Temperature	See derating curve
Ts	Storage Temperature	-40~85°C
Ho	Operating Humidity	0~95%
Hr	Storage Humidity	0~95%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	0.1M Hrs (min.)
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C	



# TPSUU300 SERIES

300W U Bracket Type  
I.T.E. Power Supplies

## Output Voltage And Current Rating Chart ( Single Output ) :


Model Number	Output Voltage	Output Current	Total Regulation	Max. Output Power	Pno (max.)
TPSUU300-105	12 VDC	23.0 A	5%	276W	1.5W
TPSUU300-108	24 VDC	12.5 A	3%	300W	1.5W
TPSUU300-109	28 ~ 30 VDC	10.71 ~ 10.00 A	3%	300W	1.5W
TPSUU300-110	36 VDC	8.33 A	3%	300W	1.5W
TPSUU300-111	48 VDC	6.25 A	2%	300W	1.5W

## PIN CHART

PIN MODEL	1	2	3	4
TPSUU300-1XX	RTN	RTN	OUT	OUT

PIN MODEL	1	2	3	4	5	6
TPSUU300-1XX	RTN	RTN	RTN	OUT	OUT	OUT


## Mechanical Specifications:

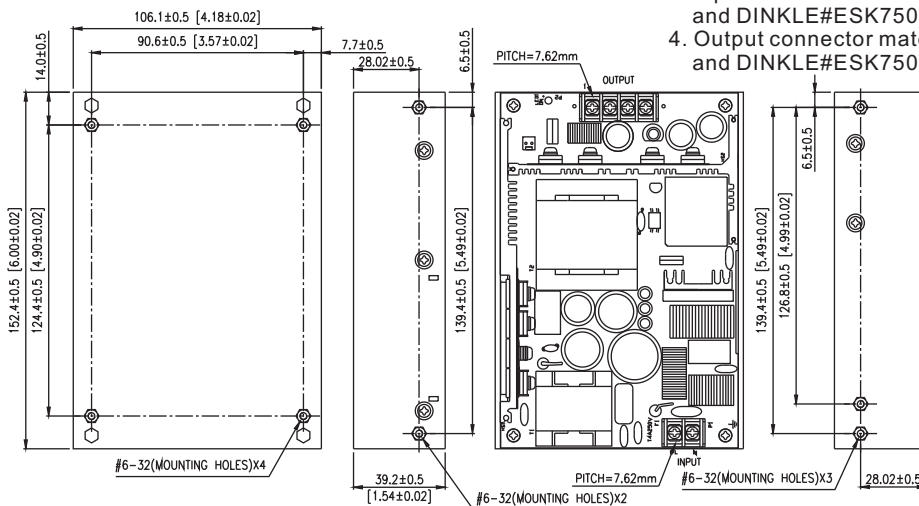

### Note:

1. Dimensions are shown in mm.
2. Weight: 790gs approx.
3. Input connector mates with DINKLE#DT-2GN-B01W-02P and DINKLE#ESK750V-02P.
4. Output connector mates with DINKLE#DT-2GN-B01W-(04P or 06P) and DINKLE#ESK750V-(04P or 06P).

## Derating Curve :

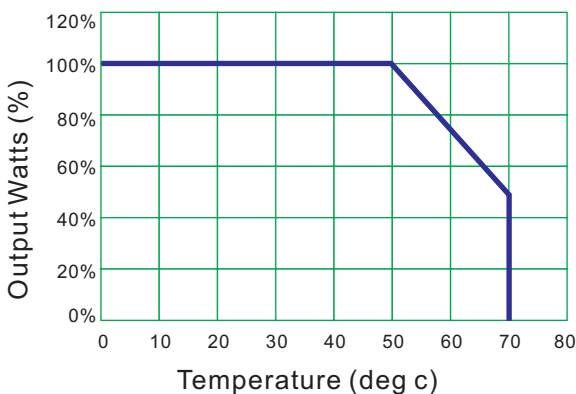

1. Operating Temperature: 0 to 70°C
2. Derate linearly from 100% load at 50°C to 50% load at 70°C

